



Key Benefits

- Does not use water
- No foul odours entering the bathroom
- Easy to install and clean
- Made of vitreous china

Installation

1. Mark and drill 8mm holes at desired height
2. Fit the plastic expansion plugs
3. Install the metal mounting bracket using the tapping screws
4. Insert the mouth piece of the PVC pipe into the black rubber sleeve
5. Hang urinal body onto mounting bracket
6. Fit the rubber sleeve and PVC pipe onto pre-set pipe and make sure the rubber sleeve is firmly fixed
7. Use silicon sealant to glue the PVC pipe, rubber sleeve, and drain
8. Pour water into urinal to check for any leakage


CL140 Urinal Trap (Available as spare part)

Mechanical trap with high sensitivity baffle that opens with a liquid flow and closes with its own gravity.



The baffle creates an air tight seal so that foul odours from the pipe cannot enter the bathroom.

The trap is easily accessible under the stainless steel drain. Depending on the amount of traffic it can last up to 5 years.

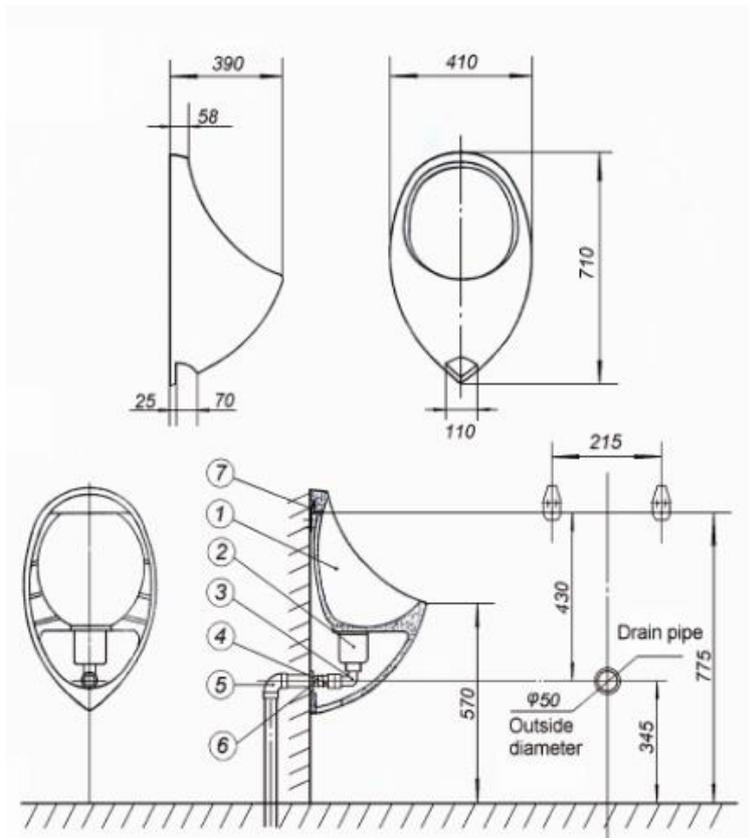

1. Urinal body
2. Stainless steel drain & trap (CL140)
3. Elbow (Ø40mm inside at large end and Ø36mm outside at narrow end)
4. Corrugated Pipe
5. Ø50mm pre-set PVC pipe
6. Ø40/36mm black rubber sleeve
7. Mounting bracket